


# CARTER CT60 Crawler Excavator



Reliability and Comfort with Flexiable Operation, User Friendly Computer with Ergonomic Controls







CARTER CT60


Crawler Excavator


Specifications	CT60	
Operating Weight	5.82 Tonne	
Bucket Capacity	0.22 m <sup>3</sup>	
Engine Model	YANMAR 4TNV94	
Rated Power	36.2/2100 kw/r/min	
Max. Flow	142.8 L/min	
Working Pressure	24 Mpa	
Fuel Tank Capacity	125 Litres	
Hydraulic Oil Tank Capacity	110 Litres	
Travel Speed	2.4/3.9 km/h	
Swing Speed	11.5 r/min	
Max. Climbing Degree	70%	
Arm Digging Force	31 KN	
Bucket Digging Force	45 KN	
Average Grounding Pressure	36 Kpa	

Overall Dimension	CT60
A - Overall Length	5943 mm
B - Overall Width	2000 mm
C - Overall Height (to top of boom)	1995 mm
D - Overall Height (to top of cab)	2619 mm
E - Counterweight Ground Clearance	740 mm
F - Min. Ground Clearance	360 mm
G - Tail Swing Radius	1745 mm
H - Track Ground Length	2000 mm
J - Track Length	2665 mm
K - Track Gauge	1600 mm
L - Track Width	2000 mm
M - Track Shoe Width	400 mm

Working Range	CT60
0 - Max. Digging Height	5889 mm
P - Max. Dumping Height	4150 mm
Q - Max. Digging Depth	3812 mm
R - Max. Vertical Wall Digging Depth	3008 mm
T - Max. Digging Reach	6257 mm
U - Max. Digging Reach at Ground Level	6102 mm






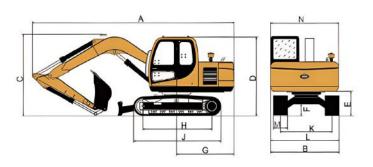









## CARTER CT60 Crawler Excavator

#### The CARTER CT60 Excavator: Performance Excellence

Carter Excavators are Engineered to Deliver Outstanding Performance. Thanks to the Robust Pumps and Reliable Components, these Machines Offer Unrivaled Strength and Reliability.

#### • Operating Weight: 5.8 tonnes

- Engine: Yanmar 4TNV94L
- ROPS, TOPS, FOPS Certified Cab for Superior Safety
- Swing Boom Design for Enhanced Maneuverability
- Drive Motors and Control Valves from KYB Japan
- Progressive Thumb Controls: User-Friendly Computer and Ergonomic Controls with ISO Control Pattern
- Comfortable Air-Conditioned Cab with Stereo, Fire Extinguisher, Glass Breaker & Adjustable Luxury Seat
- Arm Breakout Force of 36Kn, Bucket Force of 26Kn
- Dual Auxiliary Hydraulic Lines/Breaker Lines
- Steel Tracks with Rubber Track Pad Guards for Protection During Operation
- Tool Kit, First-Service Filters & Oil Suppied

Experience Peace of Mind with a 5 Year/5000 Hour Warranty, Ensuring that your Investment is Protected for Years to come.


Customize your Machine with any Additional Attachments or Features to Suit Your Specific Needs.

#### **PACKAGE DEAL**

Trench Bucket
Tilt Bucket, Twin-Cylinder
Rock/Digging Bucket
Hydraulic Quick Hitch

















### **ATTACHMENTS** AVALIABLE









**Post Driver** 



**Stump Grinder** 



**Shears** 



**Grab Bucket** 



**Weed Rake** 



**Hedge Trimmer** 



**Tree Saw** 



**Rock Breaker** 



**Bucket** 

